

GET ACCESS TO **SUCCESS**

JCB ELECTRIC SCISSOR - S3246E

Best-in-class safety



- Meets latest industry standards (EN280)
- Pothole protection, Tilt & Load sensing
- Emergency controls
- Basket lowering safety delay

Remarkable Productivity and Performance



- Fully proportional raise/ drive controls
- Waterproof platform power outlet
- Folding guard rails
- Charge level indicator

Best-in-class durability & reliability




- Full pivot boss for rigidity & durability
- Motor & component protection
- Electro Deposition Painting (EDP) process
- Wear pads to stop metal wear out

Access to Heights with Ease



- Ergonomic joystick & cradle design
- Easy foot pedal extension deck
- Battery and Hydraulic doors
- Non-marking tyres

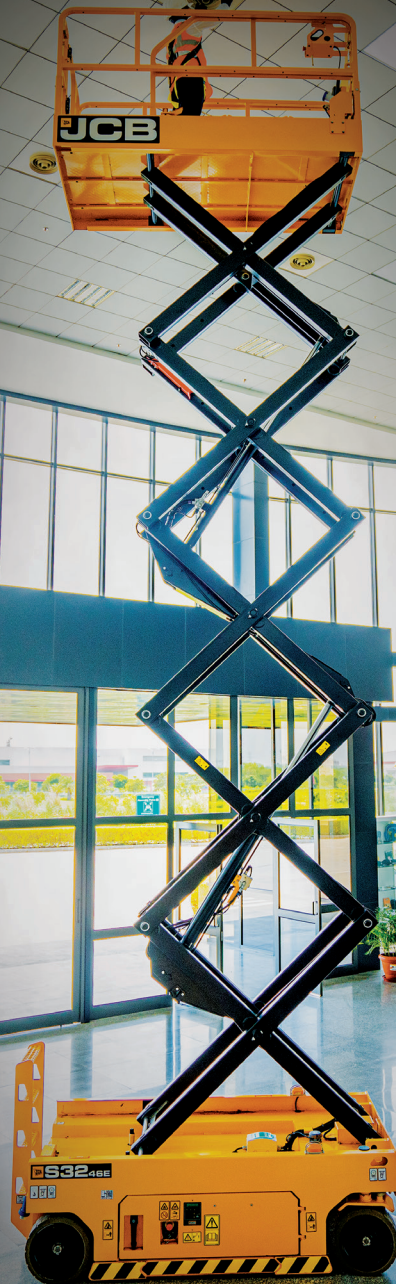

To know more
scan here.



Watch here to
explore more.



Max. Platform Height: 9.7m | Max. Working Height: 11.7m

SPECIFICATION: ELECTRIC SCISSOR

KEY SPECIFICATIONS

| Model | | S3246E |
|-------------------------------------|---------|-------------------|
| Platform size (L x W x H) | m | 2.25 x 1.15 x 1.1 |
| Load capacity | kg | 320 |
| Max. platform occupants (outdoor) | person | 1 |
| Max. platform occupants (indoor) | person | 2 |
| Max. allowable side force (indoor) | N | 400 |
| Max. allowable side force (outdoor) | N | 200 |
| Max. allowable wind speed (outdoor) | m/s | 12.5 |
| Max. allowable slope (front/back) | degrees | 3 |
| Max. allowable slope (side/side) | degrees | 1.5 |
| Ground clearance (stowed) | m | 0.1 |
| Wheelbase | m | 1.85 |
| Turning radius (outside) | m | 2.35 |
| Turning radius (inside) | m | 0 |
| Gradeability | % | 25 |
| Max driving speed (stowed) | km/h | 3.4 |
| Max driving speed (raised) | km/h | 0.8 |
| Raising time (loaded) | s | 49~54 |
| Lowering time (loaded) | s | 40~46 |
| Solid tyre dimensions | mm | 380 x 125 |
| Hydraulic oil tank vol. | L | 12 |
| Hydraulic system vol. | L | 16 |
| Hydraulic system pressure | Mpa | 24.8 |
| Battery | V | 6V x 4 |
| Power unit | V DC | 24 |
| Input voltage of Charger | V AC | 100~240 |
| Drive and steer model | | 2, front-wheel |
| Brake | | 2 rear-wheel |
| Tyres | | Non-marking |

DIMENSIONS

| Model | | S3246E | |
|-------|---|--------|------|
| A | Max. platform height | m | 9.7 |
| | Max. working height | m | 11.7 |
| B | Extension outreach | m | 0.9 |
| C | Overall length (stowed) | m | 2.39 |
| D | Overall width (stowed) | m | 1.18 |
| | Overall height (stowed, guardrail folded) | m | 1.86 |
| E | Overall height (stowed, guardrail unfolded) | m | 2.48 |
| | Overall weight | kg | 2866 |

INDUSTRY LEADING CUSTOMER SUPPORT



Extensive
dealer network



Trained mobile
service engineers



5 Parts
warehouses



Service vans



24x7 Support
1800-1037-386

Call us for a demo: 1800-1037-386

Follow us: [f](#) [t](#) [v](#) [i](#) [in](#) /JCBIndiaLtd



To know more
Scan the QR code

Dealer's stamp:

JCB Always looking
for a better way